


2200lbs Electyo-hydraulic Motorcycle Lift

Solenoid lock release, wired remote control


Optional: Side Platform Extensions & Ramps

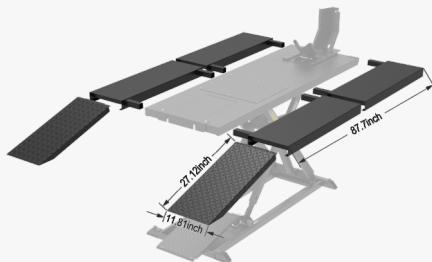


Optional: Wheel/Dolly Kit (2 rollers+ 1 moving bar)



Removable front wheel chock



Removable Back Plate



Solenoid Lock Release



Remote Control with Magnet



Built-in Power Unit

Specifically designed for heavy motorbike and/or low ground clearance.

Fully electrical and hydraulical, no air needed!

At driving the front wheel into the chock the smart swivel-down mechanism locks the motorcycle.

The front wheel chock can be mounted at various positions on the table also for motorbikes with a wheelbase of 2.5 meters.

Removable back plate for rear wheel changing

Removable front wheel chock enables the user to easily remove the front forks.

Innovative automatic safety lock activating device.

Skid proof diamond plate approach ramp.

Remote control with magnet.

Technical Data

Load Capacity	2200lbs
Min. Height	6.69inch
Max. Lifting Height	47.24inch
Platform Length	87.7inch
Platform Width	35.04inch
Overall Length	113.31inch
Motor Power	1.5kW
Power Supply	110V/60Hz/1Ph